
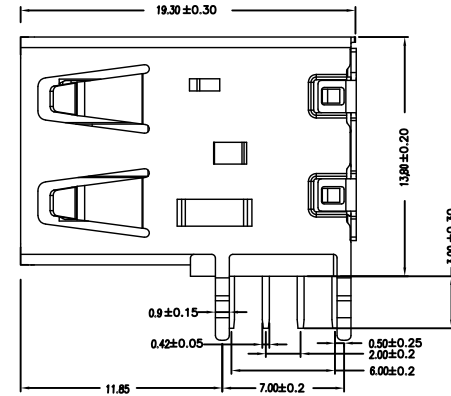
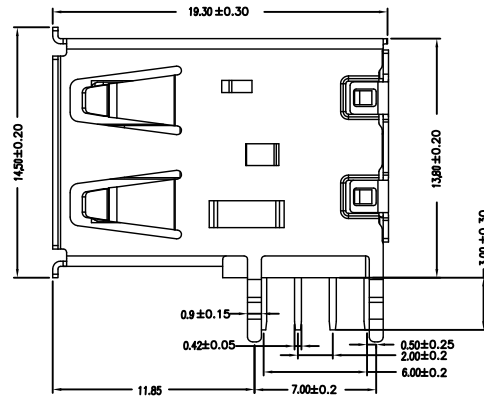


S:Scrolls

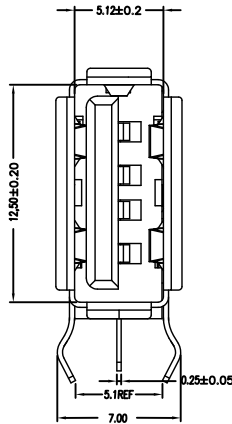

F:Flat

Housing Material: PBT UL94V-0, black/White

Contact Terminal: C2680

Metallic Shell: Spcc430

CONTACT: UNDER PLATED 50u" MIN. NICKEL ALL

OVER 100u" MIN. TIN IN SOLDERING

AREA GOLD PLATED IN CONTACT AREA.

Salt Spray Test Requirements: Test 12H

High temperature resistance of gelatinous heart:200°~220°

Contact Resistance.


30 milliohms MAX

Dielectric Withstanding Voitage:

500 V AC AT Sea Level

Insulation Resistance:

1000MEGA ohms MIN

NO 번호	DATE 변경일자	DESCRIPTION OF REVISION 변경내용	DESIGNED 작성	CHECKED 검토	APPROVED 승인	MATERIAL 재질		SPECIFICATION 규격		FINISH 표면처리	QUANTITY 수량	SCALE 척도
						DESIGNED 작성	CHECKED 검토	APPROVAL 승인	DRAWING NUMBER 도번			UNIT 단위
						김도현	박재규	최국호	PART NAME 부품명	HY-1BU07-X	 한유안 ELECTRONICS CO.,LTD	/ mm
								MODEL NAME 제품명	HY-1BU07-X			
DESIGNED 작성						삼현전자 주식회사			3RD ANGLE PROJ	HANYONES TECH CO.,LTD	FILE. NO.	