



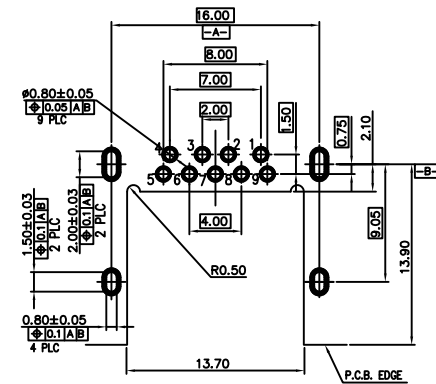
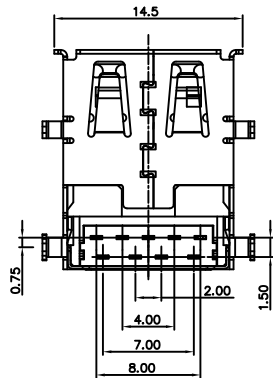



S:Scrolls




F: Flat



RECOMMEND P.C.B LAYOUT (THICKNESS=1.2mm)

Material
 Housing Material: PA9T, UL94V-0, blue
 Contact Terminal: Copper Alloy
 Metallic Shell:SUS
 Plating
 Underplating: Nickel
 Contact Plating: 1μ" Gold
 Solder Tail: 100μ" Min. Tin
 Metallic Shell: Nickel
 Electrical
 Voltage Rating: 100 V AC
 Current Rating: 0.25A (Signal pins 2,3,5,6,7,8,9) 1.8A (Power Pins 1,4)
 Contact Resistance: 30mΩ Max.
 Insulation resistance: 1000MΩ Min.
 Dielectric withstanding voltage: 100V AC/Minute
 Mechanical
 Durability: 1500 cycles
 Mating Force: 35N (3.57Kgf) Max
 Unmating Force: 10N (1.02Kgf) Min. initial, 8N min after test
 Environmental and Processing
 Operating Temperature: -40°C to +85°C

NO 번호	DATE 변경일자	DESCRIPTION OF REVISION 변경내용	DESIGNED 작성	CHECKED 검토	APPROVED 승인	MATERIAL 재질		SPECIFICATION 규격		FINISH 표면처리	QUANTITY 수량	SCALE 척도 UNIT 단위	
						DESIGNED 작성	CHECKED 검토	APPROVAL 승인	DRAWING NUMBER 도번			mm	
						김도현	박재규	최국훈	PART NAME 부품명	HY-3BLRT06-X	 한유안 ELECTRONICS CO.,LTD		
								MODEL NAME 제품명	HY-3BLRT06-X				
DESIGNED 작성						삼현전자 주식회사			3RD ANGLE PROJ	HANYONES TECH CO.,LTD	FILE. NO.		