


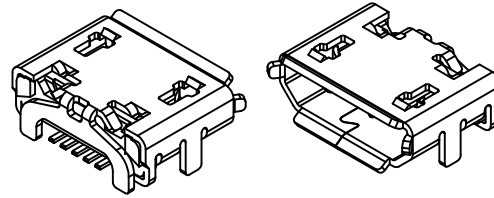




Scrolls (S)

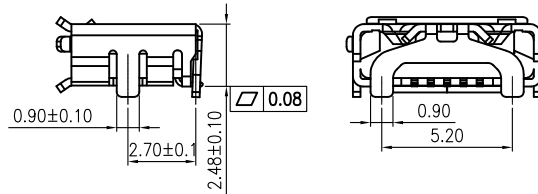

Flat(F)




RECOMMENDED PCB LAYOUT(TOP VIEW)

GENERAL TOLERANCES:±0.05

NOTES:

1. MATERIAL&FINISH:SEE TABLE A;
2. SPECIALITY:
 - 2.1 RATED CURRENT:1.8A For Pin1.5
0.5A For Pin 2,3,4
 - 2.2 RATED VOLTAGE:30V
 - 2.3 CONTACT RESISTANCE:30mΩ Max
 - 2.4 INSULATION RESISTANCE:1000MΩ Min 500V DC
 - 2.5 DIELECTRIC WITHSTANDING VOLTAGE:100V AC 1Min.
 - 2.6 SOLDER ABILITY:255±5°C, 5±0.5S.
 - 2.7 DURABILITY:5000 CYCLES Min.
 - 2.8 OPERATING CONDITION:TEMPERATURE-40°C~+85°C;
HUMIDITY 80% R.H Max
3. MECHANICAL:
 - 3.1 INSERTION FORCE:35N Max
 - 3.2 EXTRACTION FORCE:8N Min
4. PLEASE CONTACT JITS SALES REPRESENTATIVE TO VERIFY PRODUCT DETAILS & AVAILABILITY

NO 번호	DATE 변경일자	DESCRIPTION OF REVISION 변경내용	DESIGNED 작성	CHECKED 검토	APPROVED 승인	MATERIAL 재질		SPECIFICATION 규격		FINISH 표면처리	QUANTITY 수량	SCALE 척도 UNIT 단위
						DESIGNED 작성	CHECKED 검토	APPROVAL 승인	DRAWING NUMBER 도번			
						김도현	박재규	최국호	PART NAME 부품명	HY-4BH24-X	 한 유안 ELECTRONICS CO.,LTD	
									MODEL NAME 제품명	HY-4BH24-X		
DESIGNED 작성						삼현전자 주식회사			3RD ANGLE PROJ	HANYONES TECH CO.,LTD		FILE. NO.