






S:Scrolls

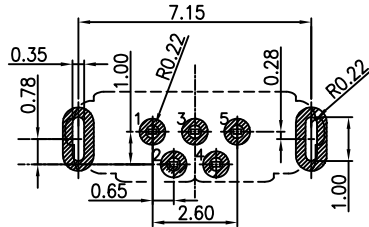

RECOMMENDED P.C.B. LAYOUT
TOP VIEW (TOLRANCE: ±0.05)




F:Flat

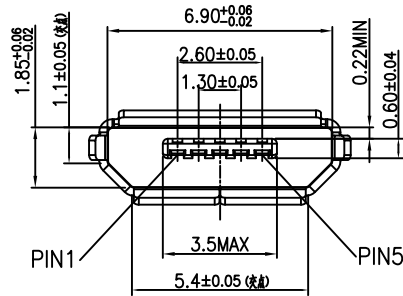

SPECIFICATIONS:

1. MATERIAL:
 - HOUSING: LCP BLACK 30%GF; UL 94V-0
 - CONTACTS: COPPER ALLOY T=0.15mm
 - SHELL: SUS201; T=0.25mm
2. FINISH:
 - CONTACT: Au PLATED ALL OVER NICKEL
 - SHELL: MATTE Sn PLATED OVER NICKEL
3. ELECTRICAL
 - CONTACT RESISTANCE: 30mΩ Max
 - INSULATION RESISTANCE: 1000MΩ Min
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC
 - CURRENT RATING: 1.0A PER CONTACT MIN.
 - VOLTAGE RATING: 30V AC/DC(RMS)
4. MECHANICAL:
 - DURABILITY: 5000 CYCLES Min.
 - INSERTION FORCE: 3.5kgf Max
 - EXTRACTION FORCE: 1.0kgf Min
5. ENVIRONMENTAL
 - STORAGE TEMPERATURE: -20°C ~ 85°C

NO 번호	DATE 변경일자	DESCRIPTION OF REVISION 변경내용	DESIGNED 작성	CHECKED 검토	APPROVED 승인	MATERIAL 재질		SPECIFICATION 규격		FINISH 표면처리	QUANTITY 수량	SCALE 척도 UNIT 단위	
						DESIGNED 작성	CHECKED 검토	APPROVAL 승인	DRAWING NUMBER 도번				
						김도현	박재규	최국환	PART NAME 부품명	HY-4BH70-X	 한유안 ELECTRONICS CO.,LTD		
								MODEL NAME 제품명	HY-4BH70-X				
DESIGNED 작성						상현전자 주식회사			3RD ANGLE PROJ	HANYONES TECH CO.,LTD		FILE. NO.	