



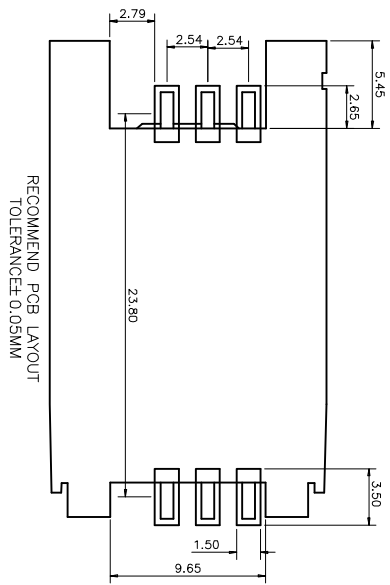

- A:Material:
- 1.Insulator:Hing temperature thermoplastic UL94V-0,(BLACK LCP)
  - 2.Pho.Bronze:Plating,40u"MIN nikel underplated CONTACT AREA:AU 1u" SOLDER AREA:80u"TN
- B:Electrical specifications:
- Voltage rating:12V AC
  - Current rating:0.5A
  - Dielectric strength:250V AC for 1 minute min
  - Insulation resistance:500MΩ
  - Contact resistance:50mΩ max
  - Operation temperature:-40°C TO 105°C
  - Product withstanding rflow soldering 260°C for 10S
- C:Mechanical specifications:
- Durability:5000cycles

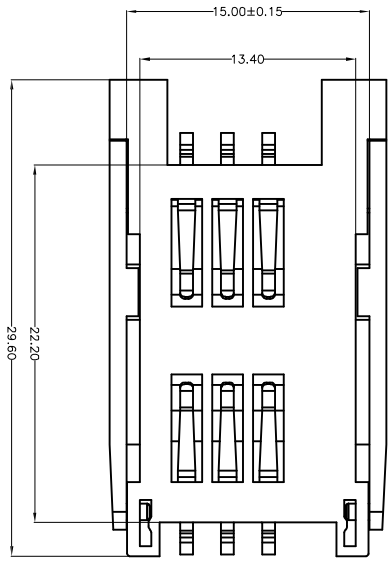

NO 번호	DATE 변경일자	DESCRIPTION OF REVISION 변경내용	DESIGNED 작성	CHECKED 검토	APPROVED 승인	MATERIAL 소재질			SPECIFICATION 규격		FINISH 표면처리	QUANTITY 수량	SCALE 척도
						DESIGNED 작성	CHECKED 검토	APPROVAL 승인	DRAWING NUMBER 도번	UNIT 단위			
						김도현	박재규	최국홍	PART NAME 부품명	HY-SIM-011B-P6	 <b>한유안</b> ELECTRONICS CO.,LTD	 mm	
						삼원전자 주식회사	3RD ANGLE PROJ	MODEL NAME 제품명	HY-SIM-011B-P6	FILE NO.			
DESIGNED 작성													