


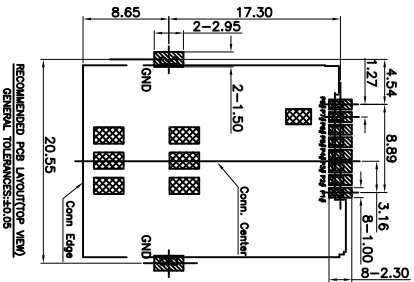


NOTES:  
1) MATERIAL:  
HOUSING: LCP UL 94V-0  
CONTACT: GS210R-H-T=0.15  
SHELL: SUS201-T=0.15  
MYLAR: POLYESTER  
2) FINISH :  
CONTACT: GOLD FLASH PLATED ON CONTACT AREA;  
GOLD FLASH PLATING ON SOLDER TAILS, WITH  
ENTIRE CONTACT UNDERPLATED  
50 $\mu$ m, NICKEL  
SHELL: 50 $\mu$ m, NICKEL UNDERPLATED OVERALL ,  
GOLD FLASH PLATED ON SOLDER TAILS  
3) INFRARED REFLOW SOLDERING: 10sec. Min. at 260 $\pm$ 3 $^{\circ}$



PIN NO.	DESCRIPTION
P1#	C1:VCC
P2#	C5:GND
P3#	C2:RST
P4#	C6:VPP
P5#	C3:CLK
P6#	C7:I/O
P7#	POL
P8#	DET



NO	DATE	DESCRIPTION OF REVISION	DESIGNED	CHECKED	APPROVED	MATERIAL			SPECIFICATION			FINISH	QUANTITY	SCALE	
						작성	검토	승인	재질	검토	승인				규격
변경일차	변경내용	작성	검토	승인	DESIGNED	CHECKED	APPROVAL	규격	도번	표면처리	수량	척도	UNIT 단위	mm	
					김도현	박재규	최국호								
					3RD ANGLE PROJ										
DESIGNED						HANYONES TECH CO.,LTD						FILE NO.			
작성						HANYONES ELECTRONICS CO.,LTD						한유안			

