


P.C.B LAYOUT

Specification:

1. Current Rating: 1.8 AMP
2. Voltage Rating: 30V AC,DC
3. Dielectric Strength: 500V AC RMS for 1 minute.
4. Contact Resistance: 30 mΩ Max.
5. Insulator Resistance: 500M ΩMin. AT 250V DC.
6. Mating/Umating cycles: 5000cycles
7. Temperature: -30°C to +80°C
8. Dustproof and waterproof grade: IP66

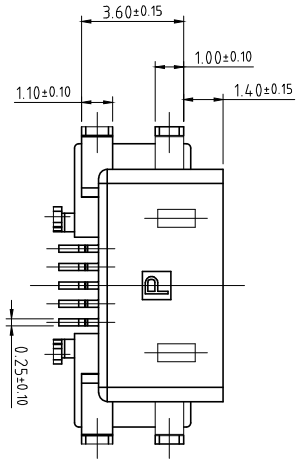

NO	DESCRIPTION	QTY	FINISH	SCALE
3	Shell	1	C26680R-H Au/Ni PlatingT=0.30mm	UNIT mm
2	Contact	5	Phosphor bronze C5210R-EH Au/Ni Plating T=0.20mm	
1	Housing	1	PA9T&LCP (G.F.30%)	

NO	DATE	DESCRIPTION OF REVISION	DESIGNED	CHECKED	APPROVED	MATERIAL			DRAWING NUMBER	QUANTITY	SCALE
						DESIGNED	CHECKED	APPROVAL			
변경일차	변경내용	작성	검토	승인	김도현	박재규	최국호	HY-X6052-2	수량	도	
DESIGNED	작성	검토	승인	3RD ANGLE PROJ	HANYONES TECH CO.,LTD			FILE NO.			

